



MNT-ND-MPA-2

Fisheye dome mounting plate
installation guide

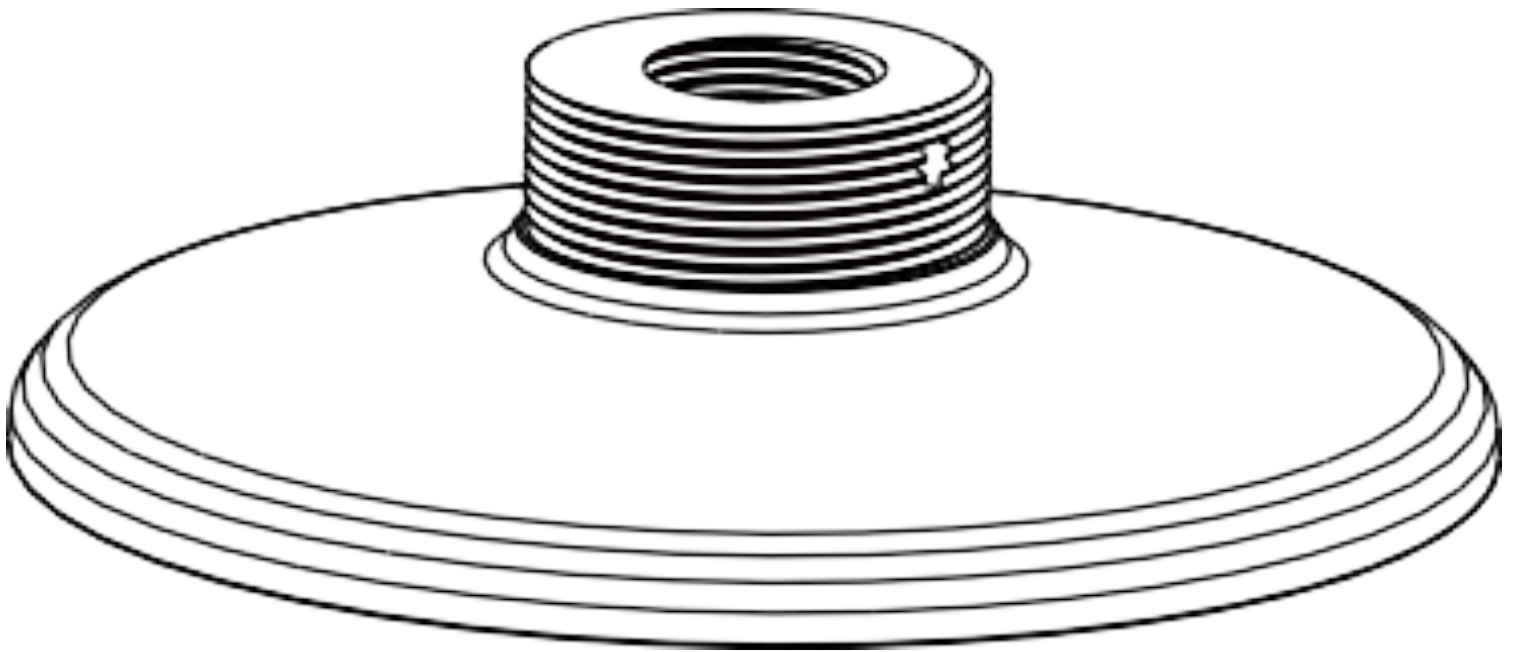

Compatible with: IPND-F80F-IRW1


Installation

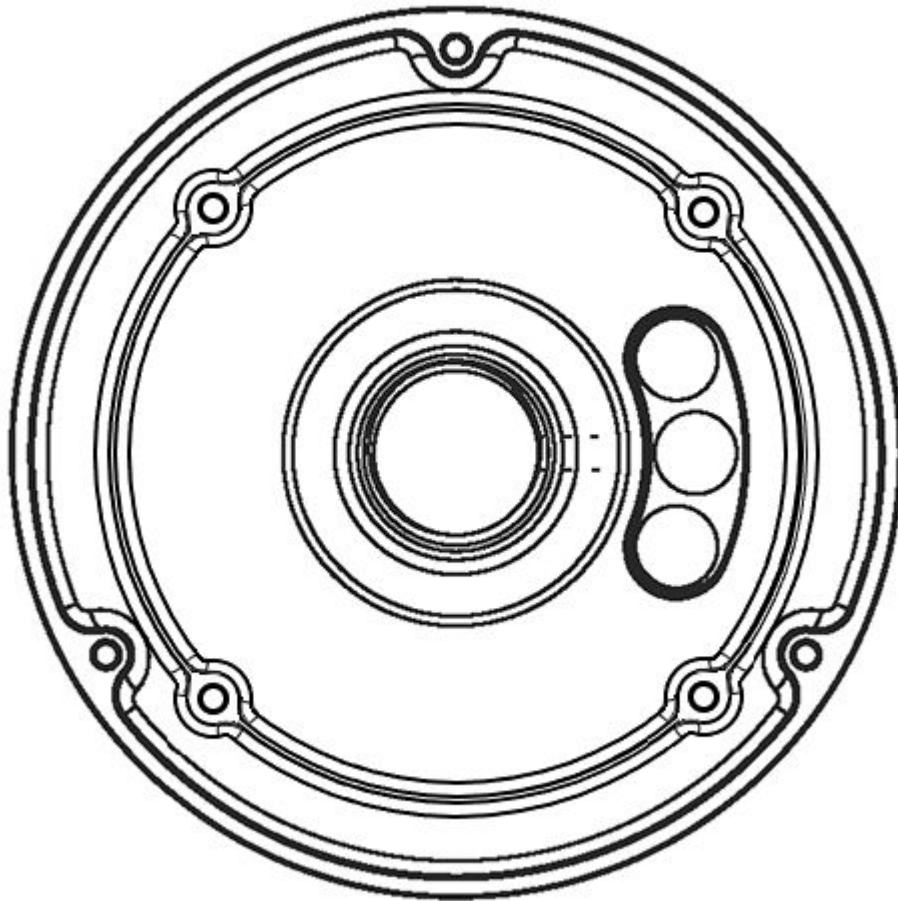Mounting Hole Guide

Hole Group	Applicable Camera	Screws Type	# of Screws
Inner 4	IPND-F80F-IRW1	M4x10	4


Mount Installation - IPND-F80F-IRW1

1. Route cables through your mounting solution and then through the adapter plate.
2. Depending on the mounting solution, thread the adapter plate into the 1-1/2" mount or onto the 3/4" NTP pipe.

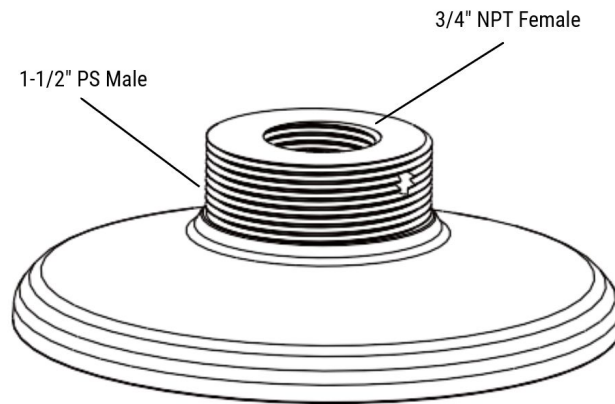

3. If threading onto 3/4" NTP pipe, use the included set screw to lock/secure the plate. If threading into the 1-1/2" mount, use the mounts included solution to lock/secure the plate.
4. Remove camera dome cover and separate mounting plate from camera main body.
5. Secure camera base plate to junction box top cover.
6. Route cables through camera waterproof grommet. See camera QSG for detailed instructions.
7. Seat camera main body onto base plate.
8. Connect cables to the camera.

Align with
inner 4 Hole
Group pattern

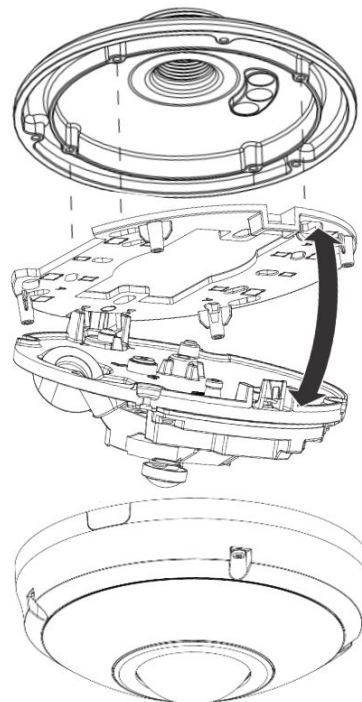

9. Secure the outer dome cover and proceed with initial setup.