


MNT-ND-JBOX-2


Waterproof Junction Box
installation guide

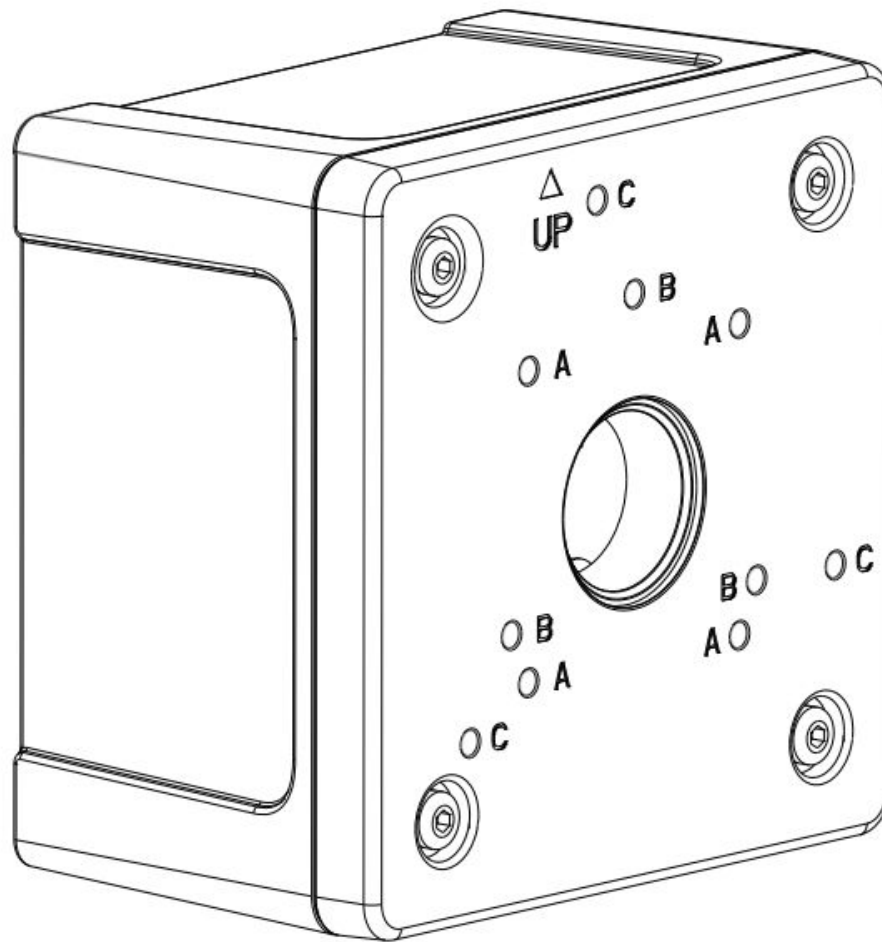

Compatible with: IPND-B80V-IRW1

Installation


Mounting Hole Guide

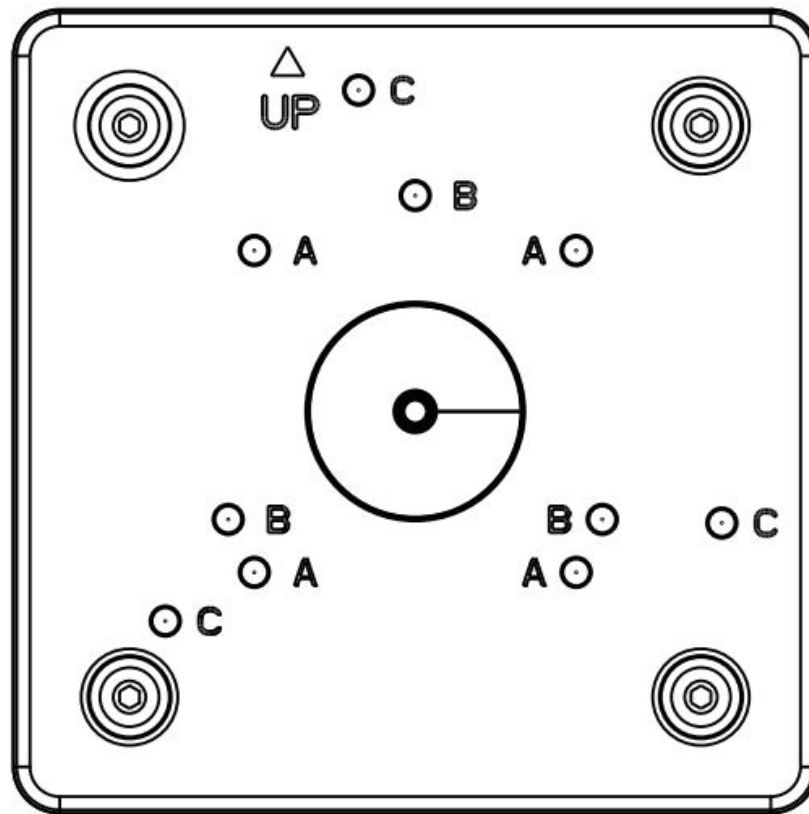

Hole Group	Applicable Camera	Screws Type	# of Screws
B	IPND-B80V-IRW1	M4x10	3

Mount Installation - IPND-B80V-IRW1

1. Remove junction box top cover.
2. Attach the included alignment sticker to a preferred position.
3. Drill the appropriate size holes for mounting hardware. If routing cables through back of junction box, also drill out cable passthrough on mounting surface.
4. Route cables into mount, then secure junction box using included mounting hardware.
5. Pass camera pigtail through junction box top cover, then install rubber seal.

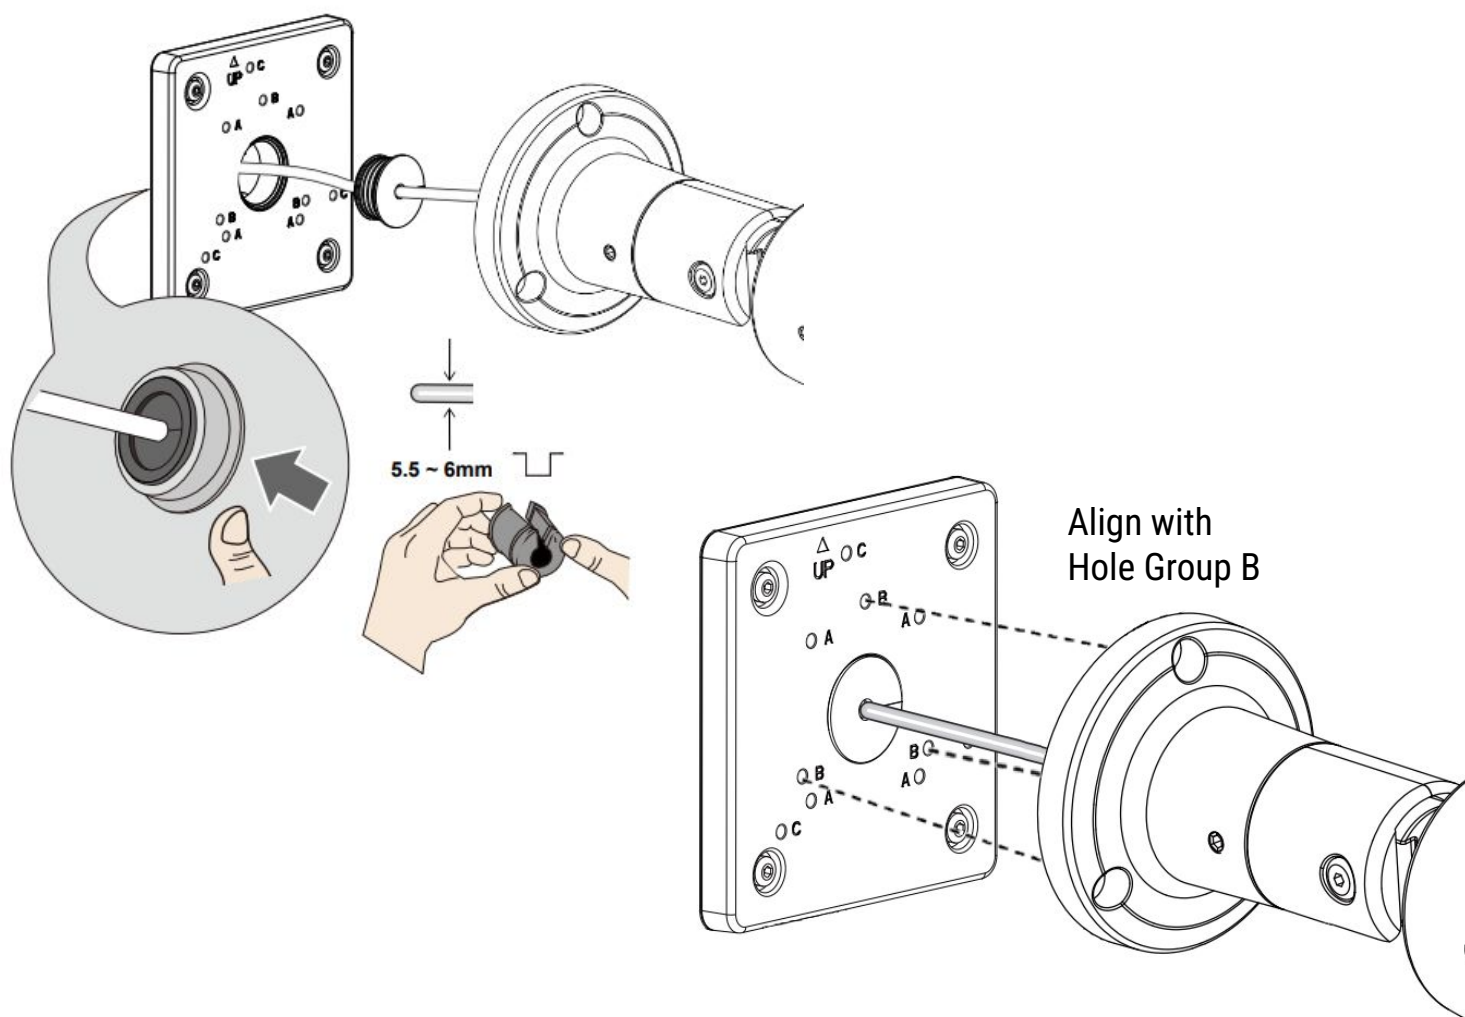

6. Secure the camera to the bracket using the included screws.
7. Connect cables to camera pigtail and ensure proper waterproofing, if installed outdoors. See camera QSG for detailed instructions.
8. Secure junction box top cover.
9. Proceed with initial setup; such as enabling network access, focus tuning, or zooming.